


O.C.-FORM® 150 UL, ALU

O.C.-FORM® 150 UL, ALU is a polyurethane soft foam impregnated with modified acrylates and laminated with an aluminum film reinforced with glass fabric

Characteristics of O.C.-FORM® 150 UL, ALU

- acoustically efficient foam for sound insulation,
- sound absorption and structure-borne sound insulation
- density of 150 kg/m³
- washable, moisture resistant
- high mechanical strength due to aluminium coating

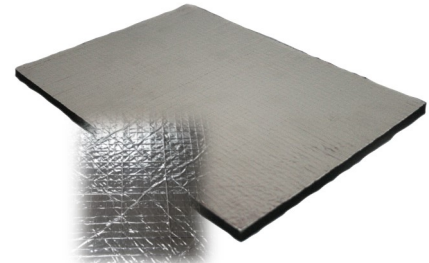


Aluminum Film

Fire protection according to DIN EN 45545 Part 2: 2016-02 classified as R1-HL3

Classification report: 12210/44331 + 12210/44332

Applications

Internal insulation of conditioning ducts, insulation of floor areas, sound insulation in partition walls

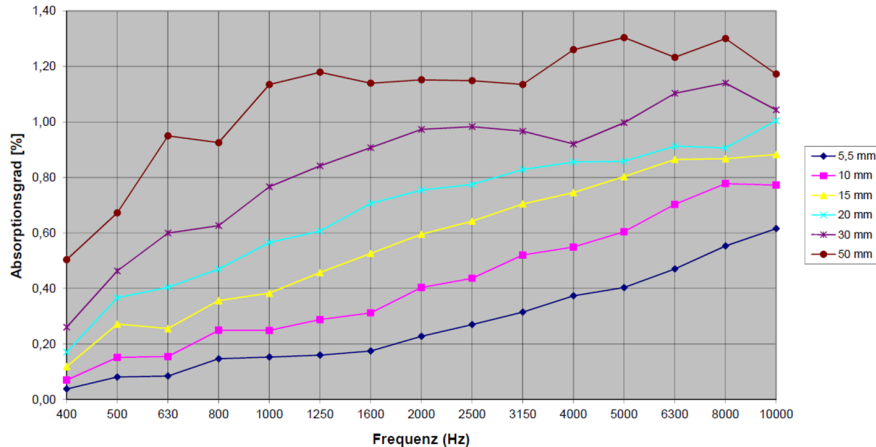

Dimensions:

thickness of 5,5, 10, 15, 20, 25, 30, 35, 40 mm

Forms of delivery

strips and die-cut parts, rolls with or without self-adhesive coating

Storage stability

unlimited, with self-adhesive (SK) 12 months
(at temperatures of +5 °C to +35 °C, keep dry and free of dust,
no direct exposure to sunlight or other heat sources)

Environment

free of heavy metal (Pb, Hg, Cd, Cr VI), prohibited substances as mentioned in
GADSL- and RoHS-list and brominated flame retardant
(PBB, PBDE, penta- and octabromine derivatives)