

O.C.-FORM® 150 UL

O.C.-FORM® 150 UL is a permanently elastic, fine-pored Polyurethane foam, impregnated with modified polyacrylate

Characteristics of O.C.-FORM® 150 UL

- Arcoustically effective foam for vibration damping
Sound absorption and impact-sound damping
- Volumetric weight of 150 kg/m³
- ageing and weather resistant as well as hydrolysis resistant



Fire protection DIN EN 45545 Teil 2: 2016-02


Classified R22 - HL3 / R1 - HL2

More norms:

UL 94, ECE R-118-02. Anhang 6,7 and 8, NF P 92-501, NF F 16-101, BS 6853 Annex B.1, UIC Codex 564-2. Appendix 8, NFPA 130:2010

Applications Protection against dust, humidity and draft, sound absorption, vibration dampening

Arcoustics

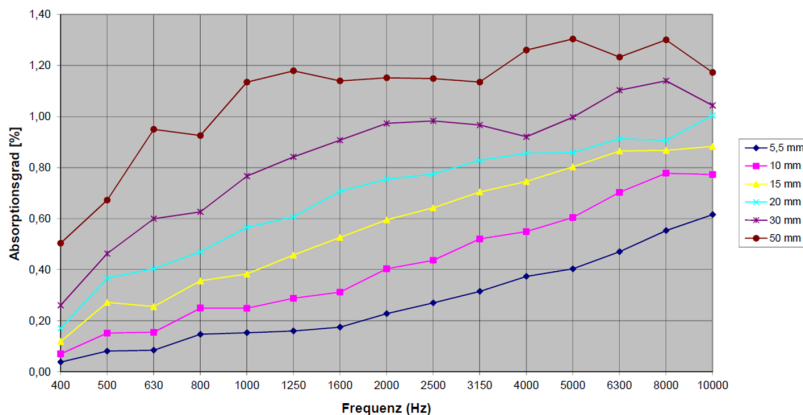

Thickness 5,5mm 10, 15, 20, 25, 30, 35 and 40mm

Possible geometries strips and die-cut parts, rolls with or without self-adhesive coating, pre-compressed or uncompressed

Storage stability 24 months— Unlimited – with self-adhesive coating (Sk) 12 months (at temperatures of about 23°C keep dry and free of dust, no direct exposure to sun or other heat sources)

Environment Free of heavy metal (Pb, Hg, Cd, Cr VI), prohibited substances as mentioned in GADSL and brominated flame retardant (PBB, PBDE, penta- and octabromine derivatives)